
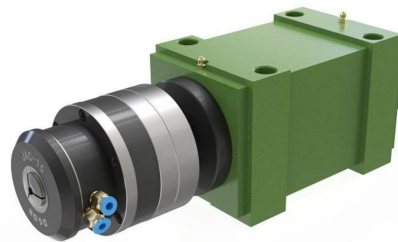


JAC+S compact high speed spindle

Specification:

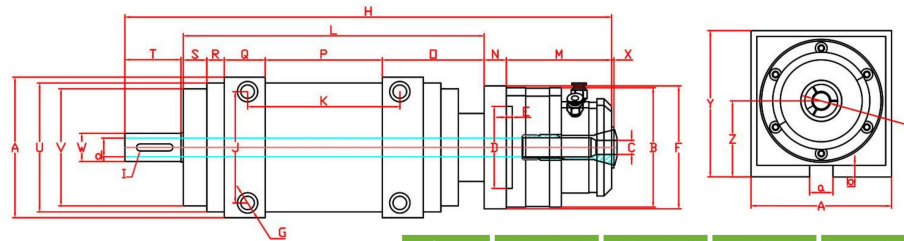

- ▶ Small size, large through-hole.
- ▶ Maximum speed 3500 rpm.
- ▶ Clamping repeatability within 0.03mm.
- ▶ Maximum through-hole 65mm, support customized large through-hole.
- ▶ Clamp change for different workpieces.
- ▶ Push forward clamping without displacement.
- ▶ Dust and waterproof (under inflation)
- ▶ Rear drive can be customized (keyway/gear/synchronous wheel, etc.)

Item	JAC-T8+S30	JAC-15+S30	JAC-25+S40	JAC-16C+S60
A	120	120	150	180
B	85	102	166	187
C	8	15	25	40
D	60	70	130	150
E	5	5	5	5
F	85	105	166	187
G	M10*4	M10*4	M20*4	M20*4
H	326	416	539	593
I	6*6 Keyway	6*6 Keyway	12*8 Keyway	12*8 Keyway
J	95	95	150	150
K	130	130	190	190
L	257	257	346	376
M	83	90	116	115
N	19	19	20	20
O	87	87	109	129
P	100	100	150	140
Q	35	35	45	50
R	15	15	20	30
S	20	20	22	27
T	48	48	61	76
U	110	110	140	170
V	100	100	130	150
W	24	24	30	55
X	2	2	2	2
Y	125	125	155	180
Z	65	65	90	90
a	20	20	20	20
b	10	10	10	10
d	15	15	20	36
Through hole	15mm	15mm	20mm	36mm
Operation pressure	3-8kgs	3-8kgs	3-8kgs	3-8kgs
Accuracy	0.015mm	0.03mm	0.03mm	0.03mm
Max rotary speed	3500rpm/min	3500rpm/min	3000rpm/min	2500rpm/min