

Spindle Holder


GR Series Spindle Holders



- Steel collet body for long life
- Center through-hole to support feeding from the rear
- Maximum speed 3500 rpm
- Collet pull back clamping, clamping repeatability within 0.01mm
- Maximum through-hole 25mm
- Dust and water resistant (under inflation).
- Compact size, easy to install
- Widely used in electronics, electrical appliances, cellular phones, and other high-precision parts processing.

Item	GR-15 spindle	GR-25 spindle
A	180	200
B	158	180
C	15	25
D	95	115
E	20	20
F	11	11
G	170	200
H	150	170
I	90	120
J	90	120
K	16	18
L	102.2	113
M	51.5	56
N	30	31
O	73	8
P	27.5	34
Q	11	11
R	β11*4	β11*4
S	12	11
Max through hole	15mm	25mm
Accuracy	0.01mm	0.01mm
Max rotary speed	3500rpm/min	3000rpm/min
Operatio npressure	3-8kgs	3-8kgs
Clamping force	1500kgf@7kgs/cm ²	1500kgf@7kgs/cm ²
Synchronous	M8*46T*115.7	M8*50T*125.95
N.W	12kgs	18kgs

Specification:

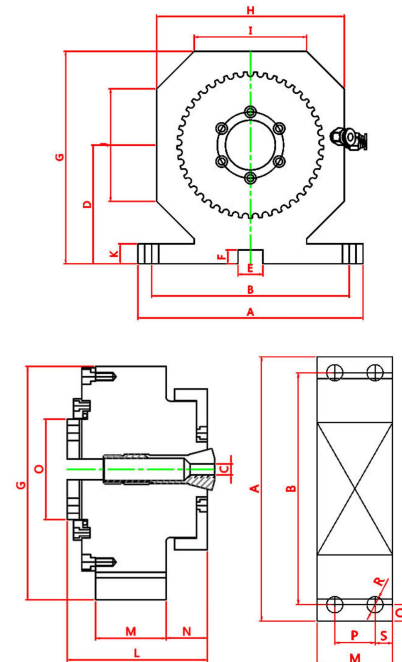

Spindle Holder