

Spindle Holder


JAC Compact Vertical Spindle Integration

- ▲ Steel collet body for long service life
- ▲ Built-in rotary cylinder, no need to install additional rotary cylinder
- ▲ Maximum speed 1000 rpm
- ▲ Clamping repeatability within 0.03mm
- ▲ Maximum through-hole 25mm, changeable collets for different workpieces.
- ▲ Forced opening, no jamming
- ▲ Dust and waterproof (under inflation)



Item	JAC-15 spindle	JAC-20 spindle	JAC-25 spindle
A	102	148	167
B	88.5	100	100
C	15	20	25
D	70	100	130
E	4	4	5
F	90	105	115
G	78	78	78
H	15	15	15
I	15	15	15
J	5	5	5
K	10	10	10
L	225	240	250
M	42	42	42
N	113	113	113
O	90 (-0.01 - 0.05)	90 (-0.01 - 0.05)	90 (-0.01 - 0.05)
P	52	52	52
Q	35	35	35
R	8	8	8
S	4	4	4
T	M6*6 (pcd100)	M6*6 (pcd100)	M6*6 (pcd100)
U	M5*6 (pcd90)	M6*6 (pcd135)	M8*6 (pcd147)
Collet	YB-15	YB-20	YB-25
Max rotary speed	1000rpm/min	1000rpm/min	1000rpm/min
Accuracy	0.03mm	0.03mm	0.03mm
Operating pressure	3-8kgs	3-8kgs	3-8kgs
N.W	9kgs	11kgs	15kgs

Specification:

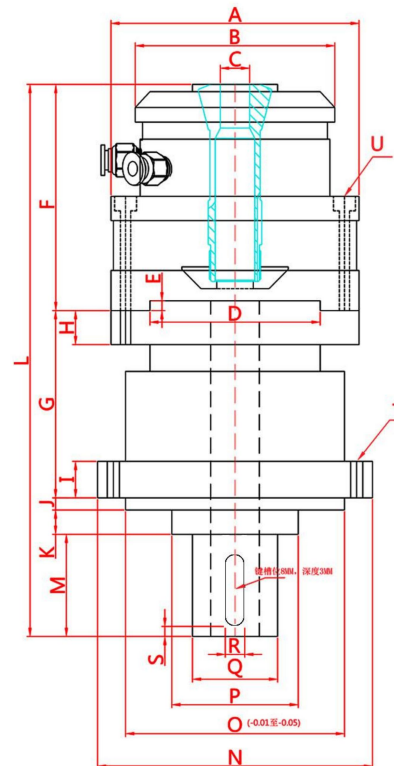

Spindle Holder

31