


High Precision Collet Chuck

GAL HIGH PRECISION AIR COLLET CHUCK

- Steel chuck body, long service life
- High precision, clamping repetition accuracy within 0.01mm
- High speed, maximum speed 3500 RPM
- Built-in rotary cylinder, no additional installation of rotary cylinder
- Installation diameter is small, through the hole is large
- With YB collet, Max hole 32MM
- Dustproof and waterproof (under inflated condition)
- Air pressure chuck is used for both internal and external clamping



Product specification

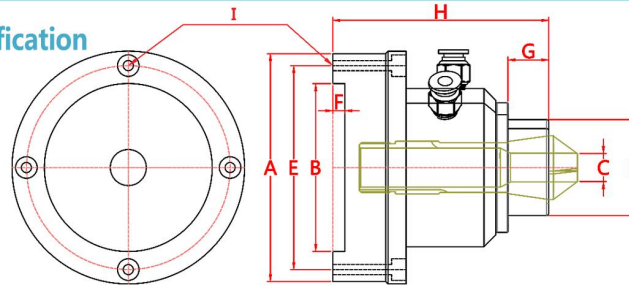

Product using case



Item	GAL-15	GAL-25	GAL-32
A	97	167	197
B	70	142	166
C	15	25	32
D	40	58	80
E	85	153	181
F	3	5	5
G	17	26	37
H	90	128	150
I	M5*4(PCD85)	M6*6(PCD153)	M8*6(PCD181)
Collet	YB-15 Collet	YB-25 Collet	YB-32 Collet
Installation Screw	4H-M5*45	6H-M6*55	6H-M8*55
Max through hole	15mm	25mm	32mm
Accuracy	0.01mm	0.01mm	0.01mm
Max rotary speed	3500rpm/min	3000rpm/min	2500rpm/min
operation pressure	3-8kgs	3-8kgs	3-8kgs
Clamping force	600kgf@7kgs/cm ²	2500kgf@7kgs/cm ²	2800kgf@7kgs/cm ²
N.W	2.5kgs	8kgs	13kgs